CS11-711 Advanced NLP Multimodal Modeling I

Sean Welleck








https://cmu-l3.github.io/anlp-fall2025/

https://github.com/cmu-l3/anlp-fall2025-code

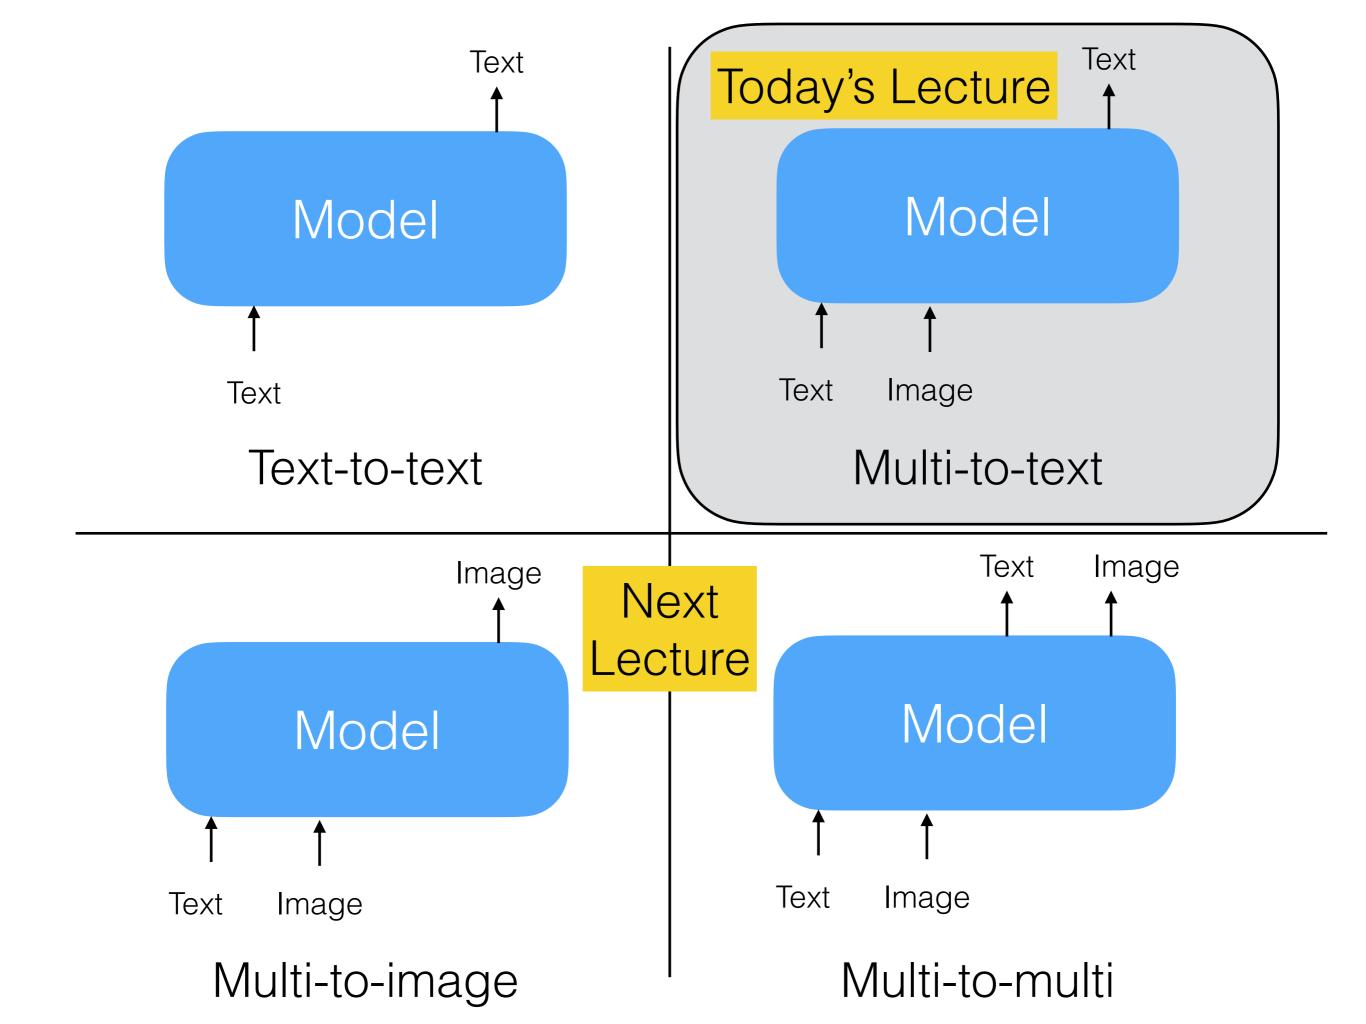




tell me about this image



This image showcases a beautiful painting of Pittsburgh, presented in an ornate gold frame. The artwork captures the city's iconic skyline, featuring its distinctive yellow bridges spanning the blue waters below. The cityscape is rendered in soft, impressionistic brushstrokes that create a dreamy, almost ethereal atmosphere.

The painting's background is filled with fluffy white clouds against a light blue sky, adding to the sense of depth and tranquility. The overall color palette is subdued, with yellows from the bridges, blues from the sky and water, and greens from scattered trees, creating a harmonious and serene composition.

Example: Al2 Molmo interface







Webpage




"Help me make a post selling this item and navigate to it. Price it at \$10 cheaper than the most similar item on the site."

"Navigate to the comments section of the latest image post in the /f/Art subreddit that contains animals."




"Buy the cheapest color photo printer and send it to Emily's place (as shown in the image)."




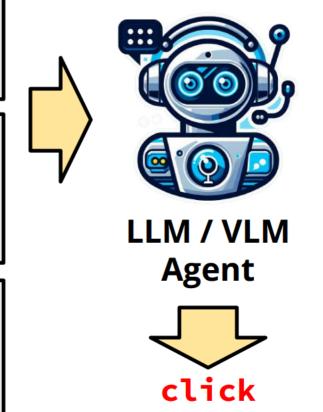


[1602]

Example: web agents (future Agents lecture!)

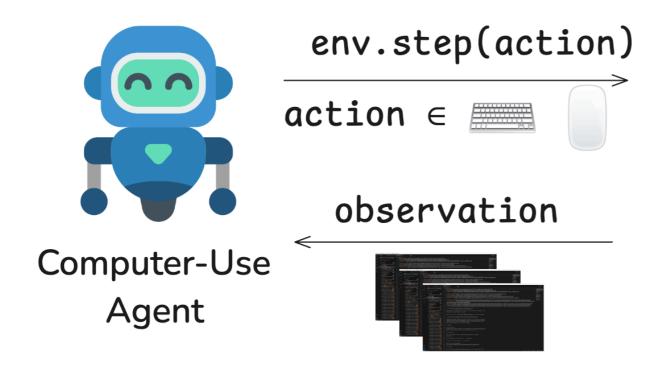

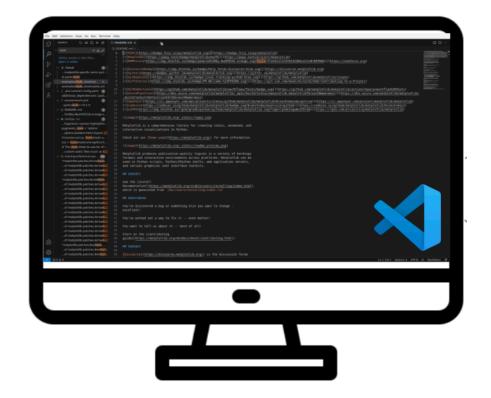

Example: computer-use agents (future Agents lecture!)

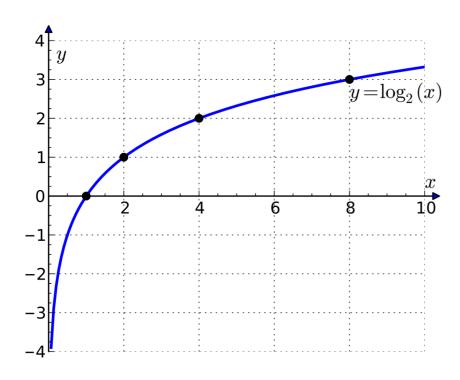

Question: The derivative of y at x = 6 is ____ that at x = 8.

Choices: (A) larger than (B) equal to (C) smaller than

Answer: (A) larger than

Question: How many zeros does this function have?

Answer: 1


Question: What is the value of y at x = 1?

Answer: 0

Example: mathematical reasoning [MathVista, Lu et al 2024]


Today's lecture

- Vision architecture basics
 - ViT [Dosovitskiy et al 2020]
- Learning image representations
 - CLIP [Radford et al 2021]
- Combining with a language model
 - Llava [Liu et al 2023]

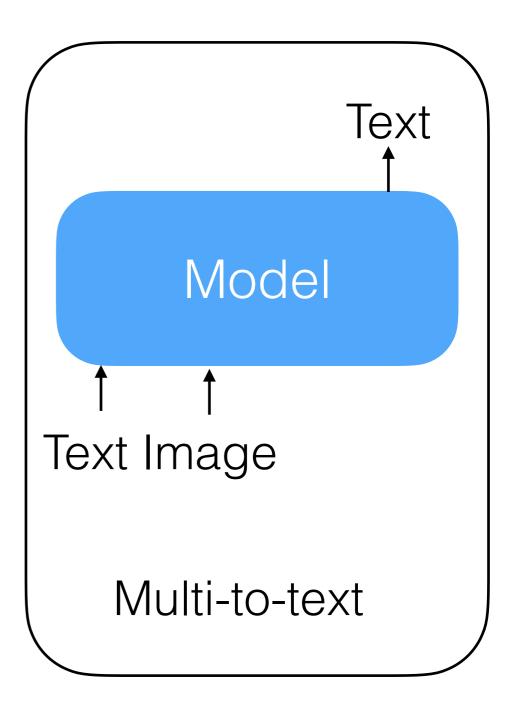



Key problem: representing images

- We represent text as a sequence of vectors (token embeddings)
- We want to also represent an image as a sequence of vectors
 - $f_{\text{enc}}(x_{\text{image}}) \rightarrow z_1, ..., z_L$
- Need:
 - Neural network architecture
 - Algorithm for learning good vectors

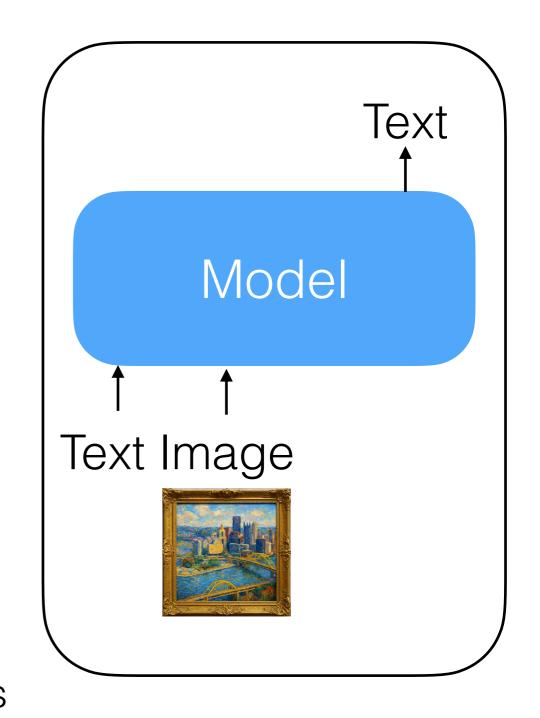

 Idea: divide an image into patches, flatten the patches into vectors, use a standard transformer

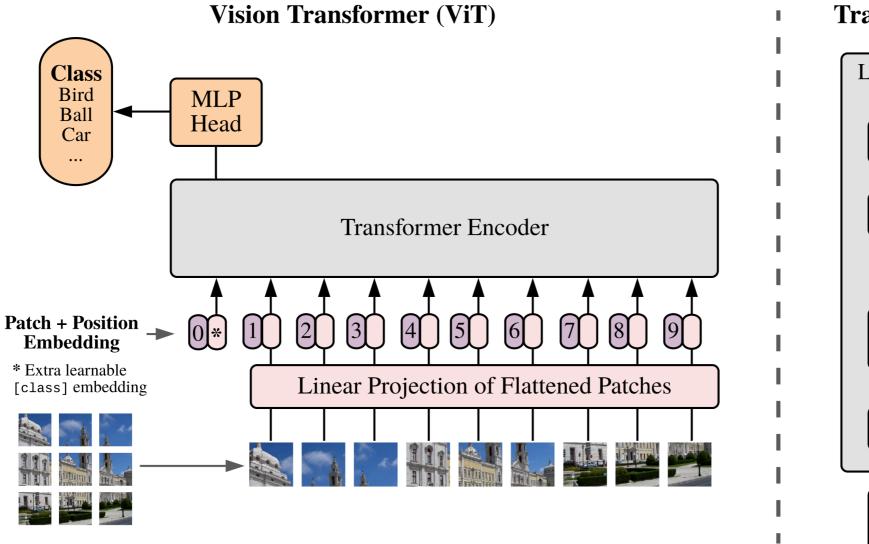


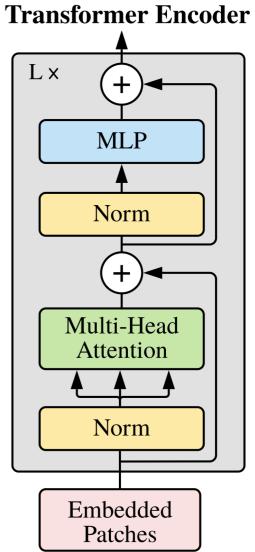

• $x_{\text{image}} \in \mathbb{R}^{H \times W \times C}$




• $x_p \in \mathbb{R}^{N \times (P^2 \cdot C)}$

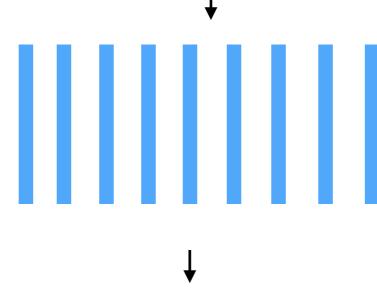

• $x \in \mathbb{R}^{N \times D}$

$$x = Wx_p$$

$$W_e \in \mathbb{R}^{D \times (P^2 \cdot C)}$$

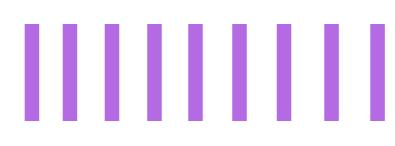

"Patch embeddings"

+ position embeddings

120 x 120 x 3
Patch: 40 x 40
$$N = \frac{(120)(120)}{(40)(40)} = 9$$

$$patches$$

$$P^{2} \cdot C = (40)(40)(3)$$


$$= 4800$$


$$\implies x_{p} \in \mathbb{R}^{9 \times 4800}$$

$$W \in \mathbb{R}^{1024 \times 4800}$$

$$\implies x \in \mathbb{R}^{9 \times 1024}$$


- The transformer transforms the patch embeddings into vector representations $z_1, ..., z_N$
- We can train the model to perform a task such as classification

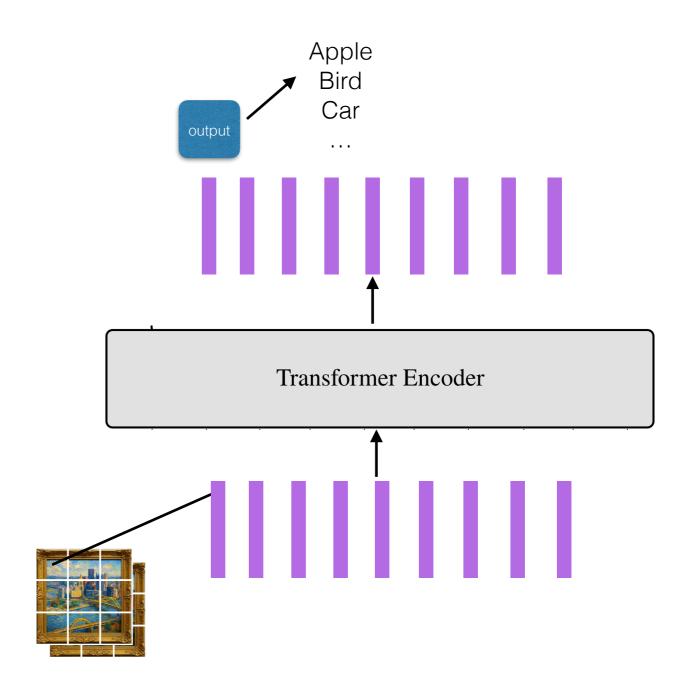

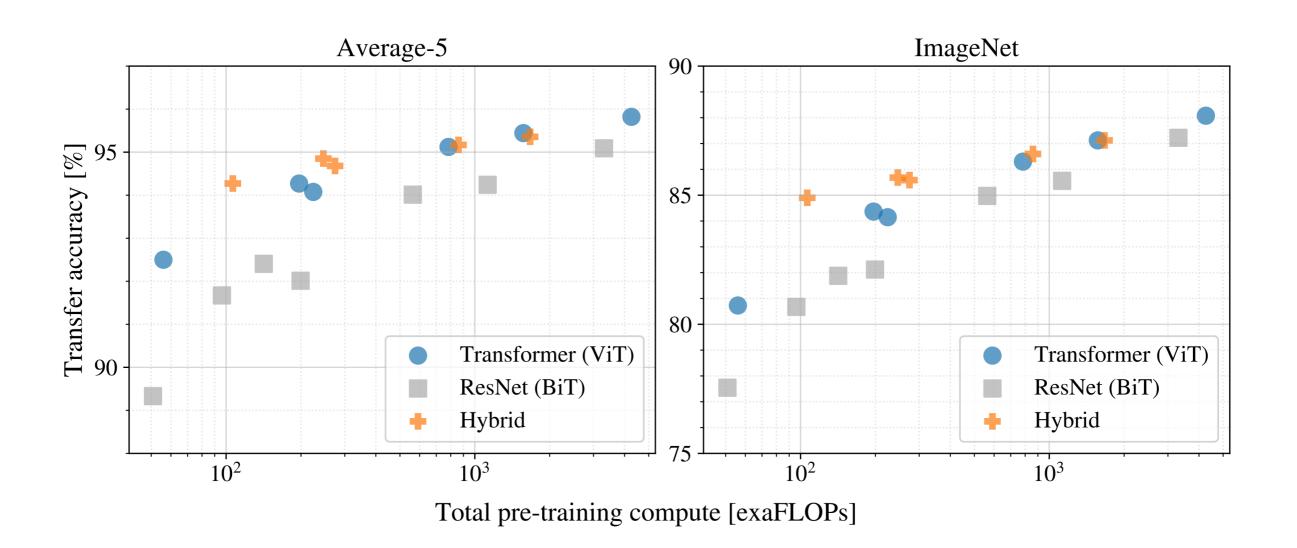


Performance versus pre-training compute for different architectures

RGB embedding filters (first 28 principal components)

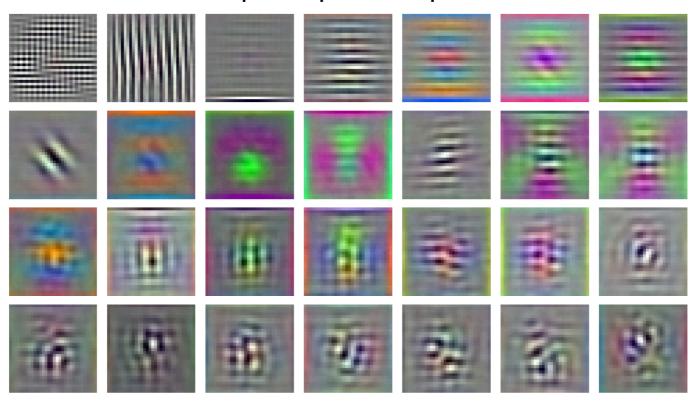

$$x = Wx_p, W_e \in \mathbb{R}^{D \times (P^2 \cdot C)}$$


Reshape rows into P x P, visualize principal components

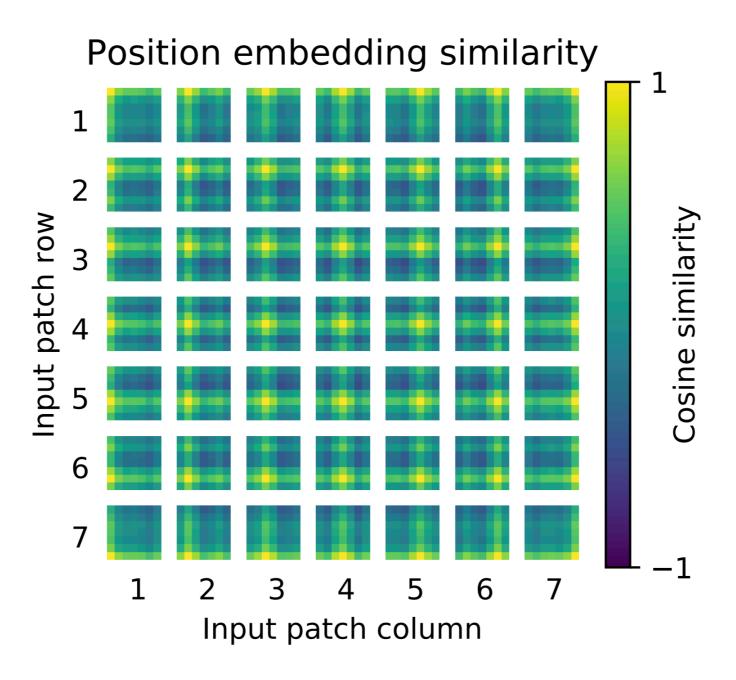

Cosine similarity between the position embedding of the patch with the indicated row and column and the position embeddings of all other patches




Can attend to regions that are salient for the task (here classification)

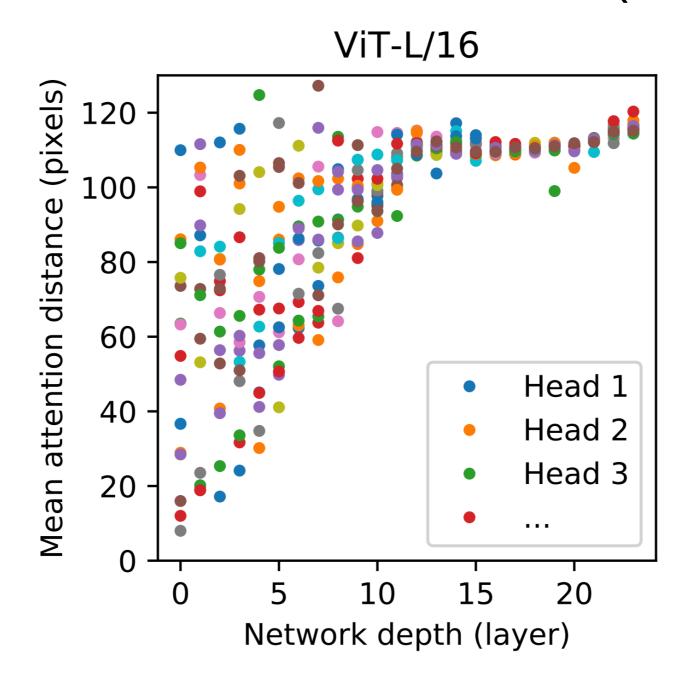

Early layers either attend to large regions or narrow regions; later layers generally attend to larger regions

Code example

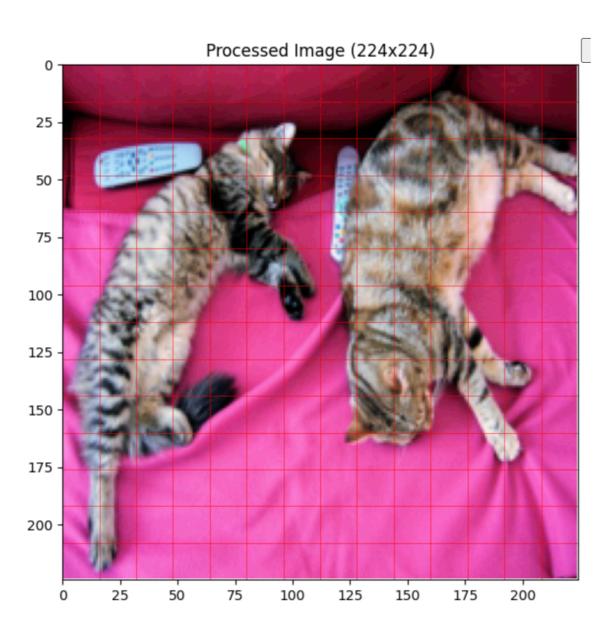

Patch embedding process:

- 1. Input image: torch.Size([1, 3, 224, 224])
 [batch, channels=3, height=224, width=224]
- 2. After patch projection: torch.Size([1, 196, 768])
 [batch, num_patches=196, hidden_size=768]
- 3. Each 16x16x3 patch → 768-dim vector

Model architecture:

Number of layers: 12

Number of attention heads: 12

Hidden size: 768 Head dimension: 64

Output shape: torch.Size([1, 197, 768])

CLS token representation shape: torch.Size([1, 768])

(Used for classification tasks)

Top 5 predictions:

1. Egyptian cat: 93.74%

2. tabby, tabby cat: 3.84%


3. tiger cat: 1.44%

4. lynx, catamount: 0.33%

5. Siamese cat, Siamese: 0.07%

Today's lecture

- Vision architecture basics
 - ViT
- Learning image representations
 - CLIP
- Combining with a language model
 - Llava

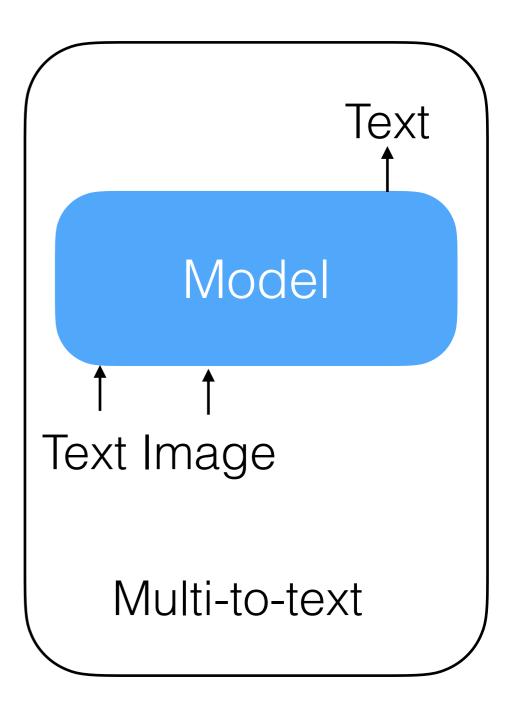


Contrastive Language-Image Pre-training (CLIP)

Goal: pre-training objective for learning image representations

- Learn from text
 - At the time, models were pre-trained on classification: the only textual supervision was from the class label.
 - A textual description of an image provides much more information than one class label.
- Scalable
 - At the time, image pre-training was largely limited to hand labeled data.
 - Want to have the property of improving by adding more compute.


- Idea: learn image and text representations jointly in a shared embedding space
 - Learn an image encoder $f_I(x) \rightarrow z_I$
 - Learn a text encoder $f_T(y) \rightarrow z_T$
 - The representations for a paired image and its text should be close together.
 - The representations for an unpaired image and text should be far apart.
- Apply the method over a large dataset of (image, text) pairs

- Data: pairs of (image, text)
 - E.g. 400 million web images with their text descriptions
- Image encoder $f_I(x) \rightarrow z_I$
 - E.g. vision transformer
- Text encoder $f_T(y) \to z_T$
 - E.g. transformer





 Basic idea: Given N (image, text) pairs, classify which image is paired with which text

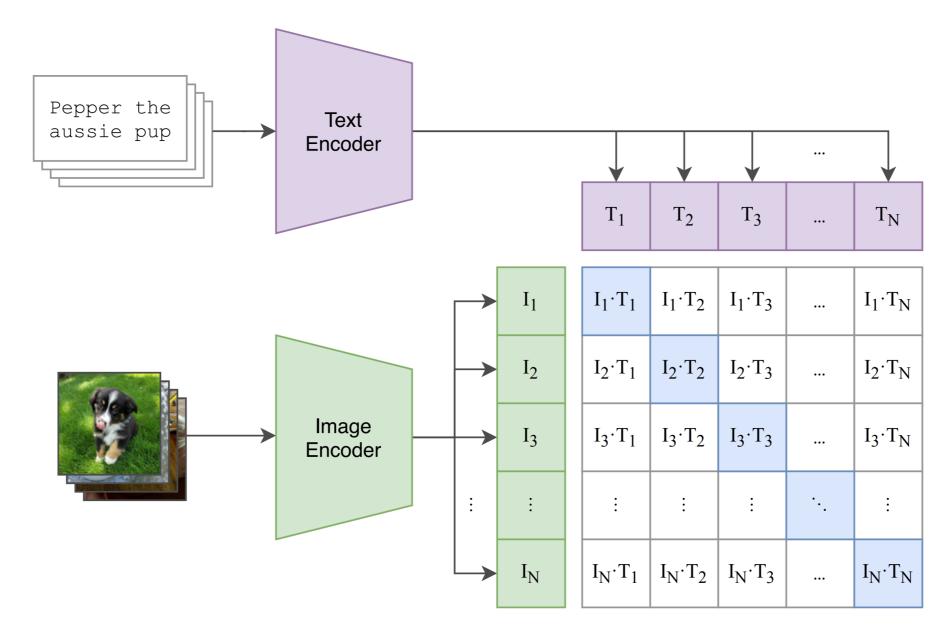

$$L((x_1, y_1), ..., (x_N, y_N)) =$$
Push up dot product of the correct pair

$$-\frac{1}{2}\sum_{n=1}^{N}\left[\log\frac{\exp\left(f_{I}(x_{n})^{T}f_{T}(y_{n})\right)}{\sum_{j}\exp\left(f_{I}(x_{j})^{T}f_{T}(y_{n})\right)}+\log\frac{\exp\left(f_{I}(x_{n})^{T}f_{T}(y_{n})\right)}{\sum_{j}\exp\left(f_{I}(x_{n})^{T}f_{T}(y_{j})\right)}\right]$$

Push down dot product of other pairs

Softmax over images


Softmax over text

Each term is a cross-entropy loss, where $p_{\theta} \propto f_I(x)^{\top} f_T(y)$ and p_* puts all of its mass on the correct pair

```
# image_encoder - ResNet or Vision Transformer
# text_encoder - CBOW or Text Transformer
# I[n, h, w, c] - minibatch of aligned images
# T[n, 1] - minibatch of aligned texts
# W_i[d_i, d_e] - learned proj of image to embed
# W_t[d_t, d_e] - learned proj of text to embed
                - learned temperature parameter
# t
# extract feature representations of each modality
I_f = image_encoder(I) #[n, d_i]
T_f = text_encoder(T) #[n, d_t]
# joint multimodal embedding [n, d_e]
I_e = 12_normalize(np.dot(I_f, W_i), axis=1)
T_e = 12\_normalize(np.dot(T_f, W_t), axis=1)
# scaled pairwise cosine similarities [n, n]
logits = np.dot(I_e, T_e.T) * np.exp(t)
# symmetric loss function
labels = np.arange(n)
loss_i = cross_entropy_loss(logits, labels, axis=0)
loss_t = cross_entropy_loss(logits, labels, axis=1)
loss = (loss_i + loss_t)/2
```

Example "zero-shot" usage

(2) Create dataset classifier from label text

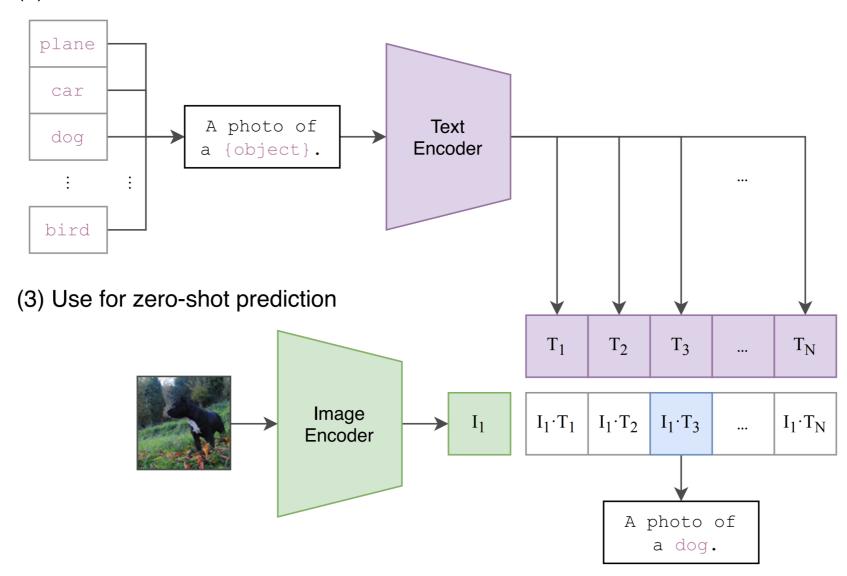


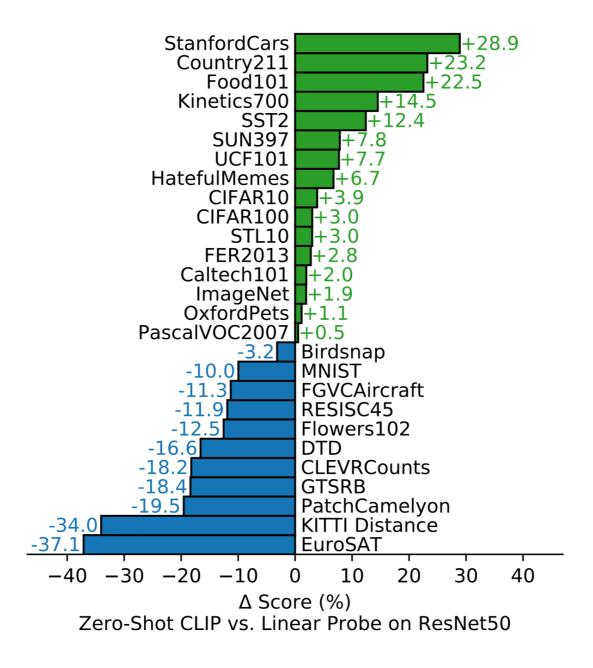



Figure 5. Zero-shot CLIP is competitive with a fully supervised baseline. Across a 27 dataset eval suite, a zero-shot CLIP classifier outperforms a fully supervised linear classifier fitted on ResNet-50 features on 16 datasets, including ImageNet.



Zero-shot performance scaling as a function of pre-training compute

Code example

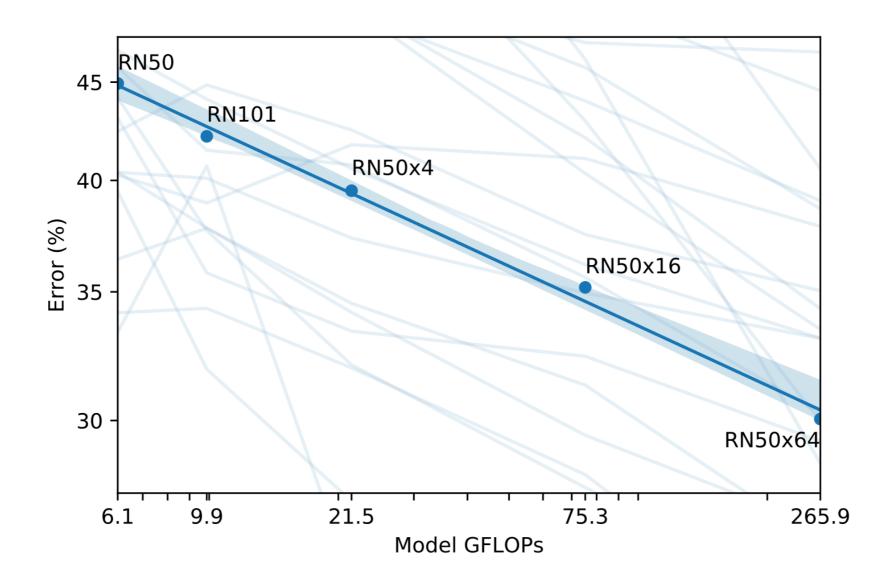

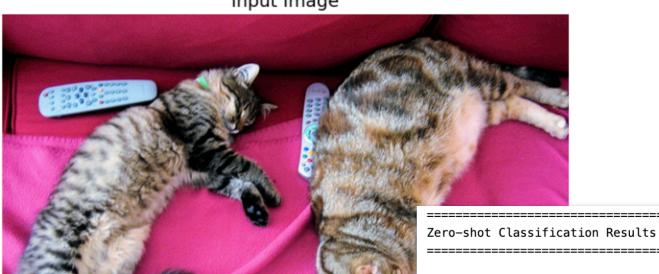

Cat vs Dog Classification

Raw similarity scores (logits):

a photo of a cat: 18.904 a photo of a dog: 11.716

Probabilities:

a photo of a cat: 99.9% a photo of a dog: 0.1%

Prediction: a photo of a cat (99.9%)

Top 5 predictions:

1. cats on a couch: 89.08%

2. two cats sitting together: 5.39%

3. animals indoors: 1.97%4. a living room scene: 1.62%


5. pets at home: 1.16%

All predictions:


cats on a couch	89.	. 08%
two cats sitting together	■ 5.39%	
animals indoors	1.97%	
a living room scene	1.62%	
pets at home	1.16%	
a photo of furniture	0.35%	
a photo of a cat	0.33%	
a photo of a kitten	0.10%	
a photo of a person	0.00%	
a photo of a dog	0.00%	

Today's lecture

- Vision architecture basics
 - ViT
- Learning image representations
 - CLIP
- Combining with a language model
 - Llava

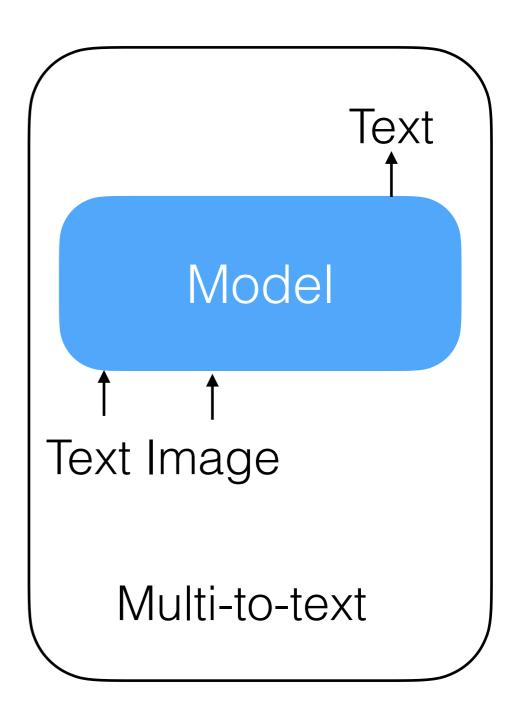

Llava

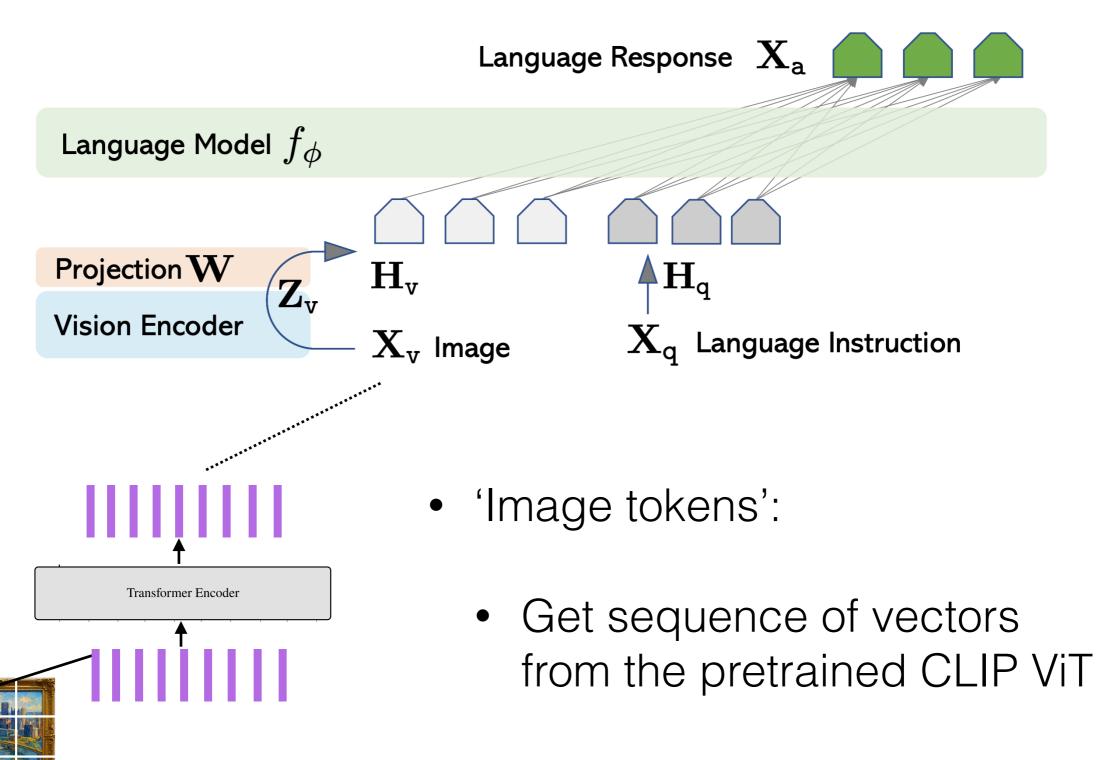

Text tokens: same as usual

Llava



Source: https://www.barnorama.com/wp-content/uploads/2016/12/03-Confusing-Pictures.jpg

User LLaVA What is unusual about this image?

The unusual aspect of this image is a man ironing clothes on the back of a minivan or van. This is not a typical place to perform this activity, as one would usually iron clothes in a more stationary and safe location, such as a home, using a regular ironing board. The scene depicted in the image is peculiar as it involves a makeshift ironing setup on a vehicle, which can be both unsafe and unconventional. Additionally, it is not clear how the man is able to maintain balance and stability while ironing clothes in such an unstable environment.

General pipeline

- Image preprocessing
 - E.g. split into patches and vectorize
- Image encoding
 - E.g. use a pre-existing CLIP model, get the ViT vectors from the last layer
- Provide the encodings to a LLM
 - E.g. linearly transform the vectors to be the model's embedding dimension
- Train/fine-tune on data that has text and images
 - For image positions, skip the loss


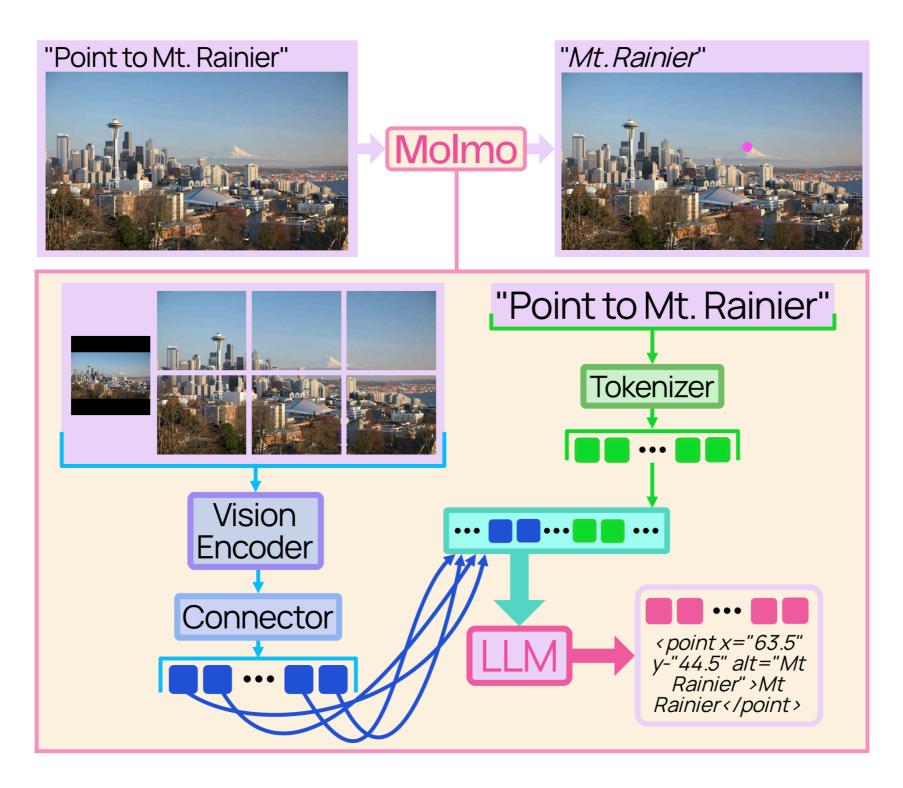



Image preprocessing




- Image encoding: CLIP ViT-L/14 336px
 - 336 x 336 image
 - 14 x 14 patches
 - => 24 x 24 grid
- Pool together each 2x2
 patch subset then transform
 to the LLM's embedding dimension
 - => 12 x 12 vectors
- Do the above for 1 full image and 12 crops

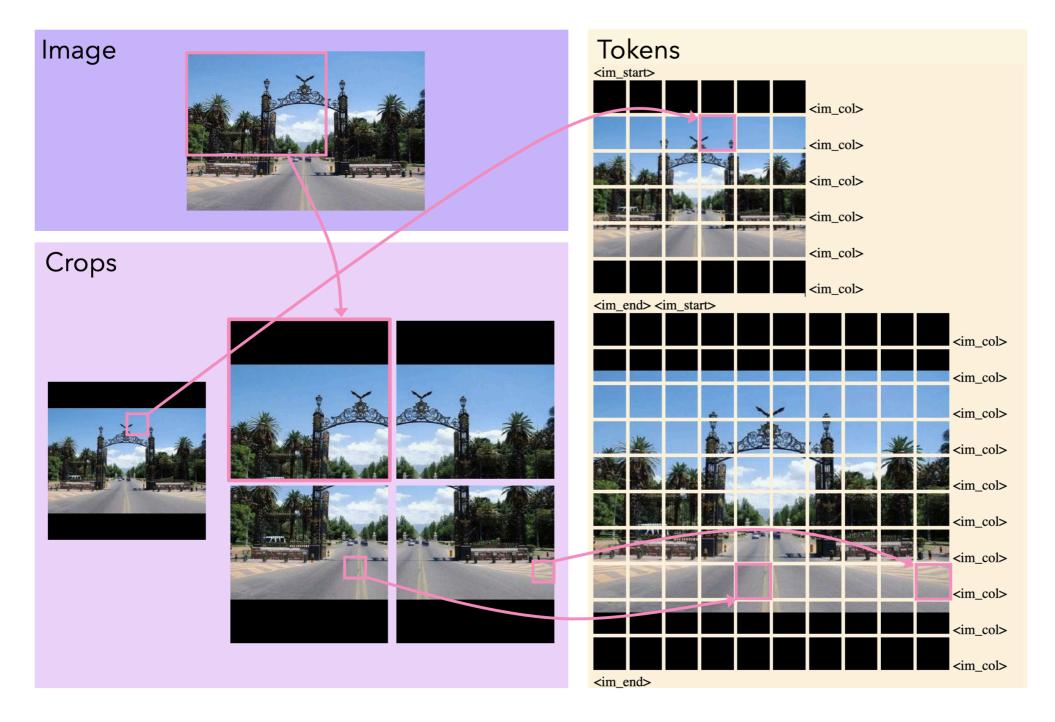

Data

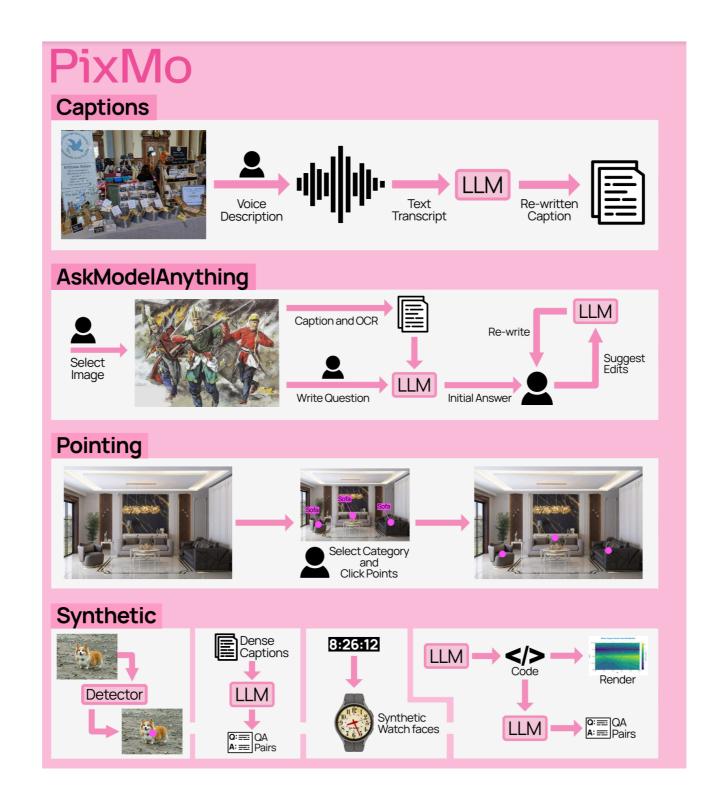

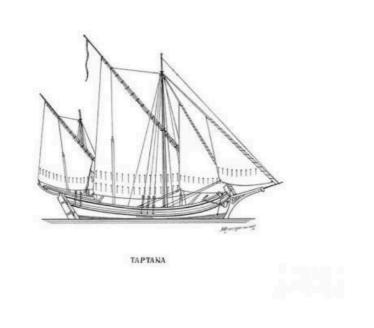

Generate a long caption about this image.

This black and white sketch depicts a boat, elegantly stationed at a pier. The boat, seemingly wooden, showcases a classic design with four prominent sails catching an imagined breeze. Below the boat, text inscribed reads "TAPTANA" in clear, uppercase letters. In the lower right-hand corner, another text, written in cursive and appearing less legible, adds an air of authenticity to the artwork. The meticulous detail in the sails and the overall structure of the boat highlights the craftsmanship and artistry involved in this sketch.



how many musicians.

Counting the <points x1="8.2"
y1="37.6" x2="10.9" y2="45.3"
x3="13.9" y3="19.4" x4="16.3"
y4="11.4" x5="17.4" y5="28.8"
x6="23.3" y6="35.5" x7="39.1"
y7="27.3" x8="42.4" y8="23.5"
x9="56.0" y9="4.8" x10="63.1"
y10="28.3" x11="69.3" y11="19.6"
x12="71.5" y12="29.7" x13="86.2"
y13="17.1" x14="94.6" y14="28....




What kind of donut is this?

This appears to be a cinnamon sugar donut. The donut itself has a light tan color typical of a traditional fried dough. It's coated with a generous layer of cinnamon sugar, giving it that classic sweet and slightly spicy flavor profile.

The topping isn't cheese as...

Parents Use a Range of Social Media Platforms; Facebook Tops the List

Among all internet users, the % of parents who use each social media platform



Source: Pew Research Center surveys, Sept. 11-14 and 18-21, 2014. N=1,597 internet users ages 18+. The margin of error for all internet users is +/- 2.9 percentage points. Parents in this survey were defined as those with children under age 18.


PEW RESEARCH CENTER


What percentage of parents use Facebook?

The image shows a breakdown of social media usage among parents. <point x="66.6" y="24.2" alt="Percentage of parents using Facebook">74 percent</point> of parents use Facebook, making it the most popular social media platform among this demographic. This statistic combines both mothers an...

Today's lecture

- Vision architecture basics
 - ViT
- Learning image representations
 - CLIP
- Combining with a language model
 - Llava

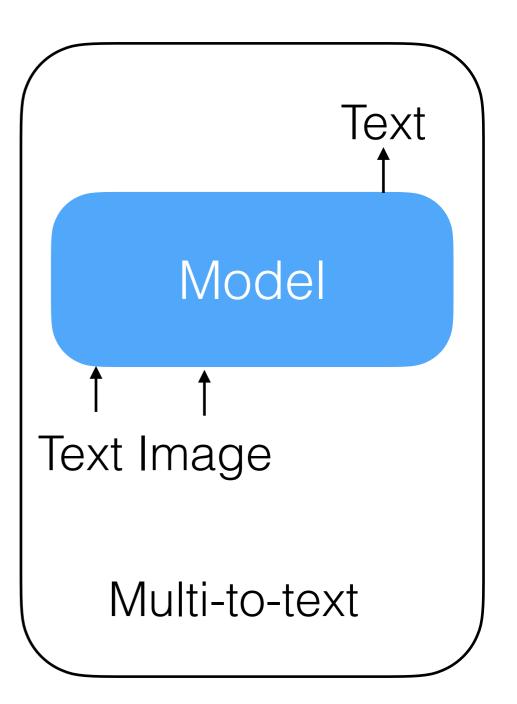

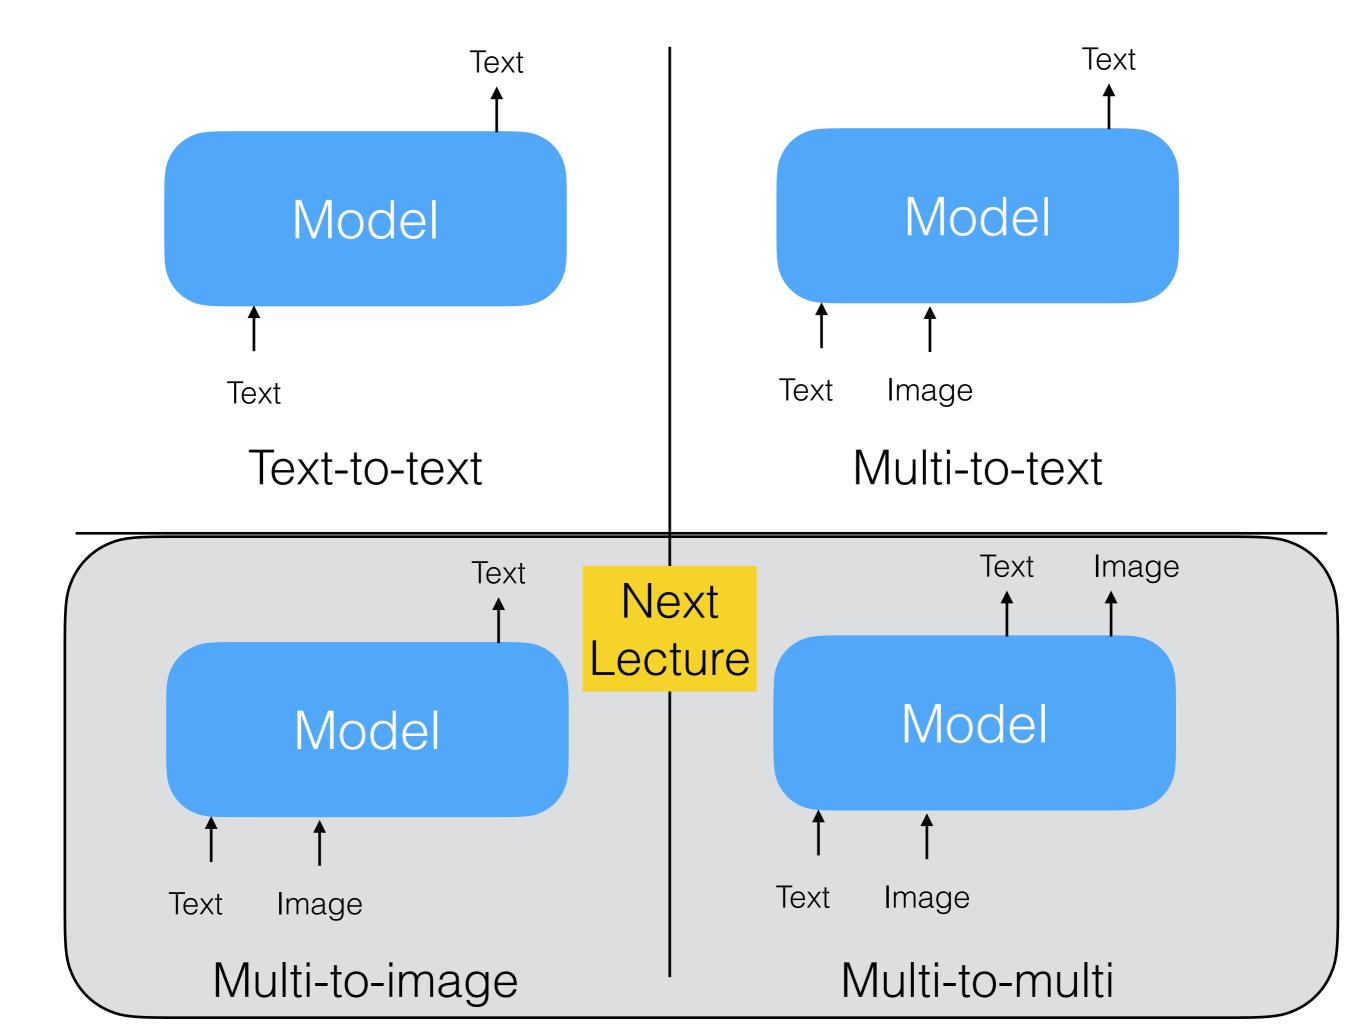

Questions?